



## RADIO REMOVAL TOOLS "FORD DIN TOOLS"

PART NUMBER: **DM-10-22**

**PLEASE READ COMPLETE INSTRUCTIONS BEFORE USING THIS Pro.Fit ACCESSORY.**  
All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.

### STEP 1.



Insert radio removal tools into holes on radio face plate. Some radios have plastic/rubber covers that need to be removed

### STEP 2.

Push tools into radio about 1/2" or until you hear or feel a "CLICK". **WARNING** do not insert tools too deeply into holes, this could cause damage to the radio retaining clips.

### STEP 3.

Apply slight outward pressure on tools with thumbs. Pull out on radio using tools as handles.

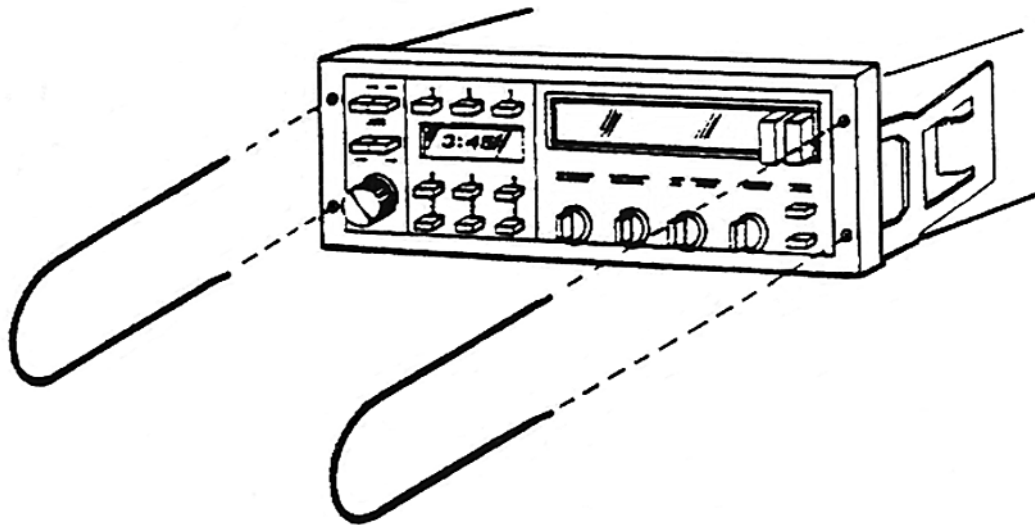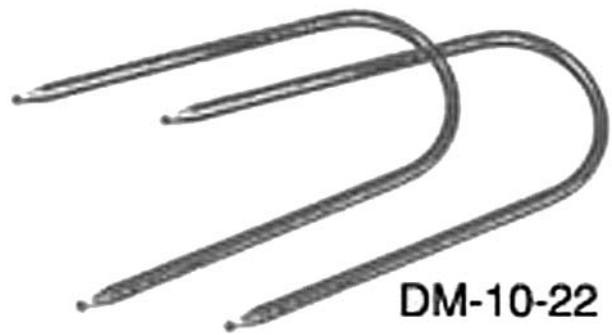

Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this Pro.Fit VSM®. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651-688-3588 or 800-388-0073 Fx: 651-688-9876

Installation Difficulty  
      
 Simple      Advanced

© Pro.Fit International, Eagan, MN 2004

VIEW INSTRUCTIONS & UPDATES  
 ONLINE @  
[WWW.PRO-FIT-INTL.COM](http://WWW.PRO-FIT-INTL.COM)